

# Installation Guide

## -BENZ New S-Class (W221)



- **High quality**
- **Higher reliability, stability**
- **Simple assembly**
- **Custom design service**

## -Glove Box Disassembly



Remove the screws of driver's seat ward, passenger's seat ward on the glove box with proper tools.



After detaching the air-con cover, remove the inside screw with a tool like the pictures.

# Glove Box Disassembly



Get the glove box separated from the car by pulling it.



## – Monitor Disassembly



Remove the protection cover at the monitor's top with a tool.



Remove the screw marked on the left picture, pull the left part out from the monitor like the right picture.

# Monitor Disassembly



Disassemble the monitor with removing screws like the pictures.



The monitor is removed from the car.



# Cup Holder Disassembly



Remove the cup holder with screws.



Removed the parts marked on the above picture from the car.



# HEAD UNIT Disassembly (DVD Controller Box)




Remove DVD cover with all screws.



Remove the screws and take Head unit out from inside.




# CAN Wiring & LCD In/Out Connection

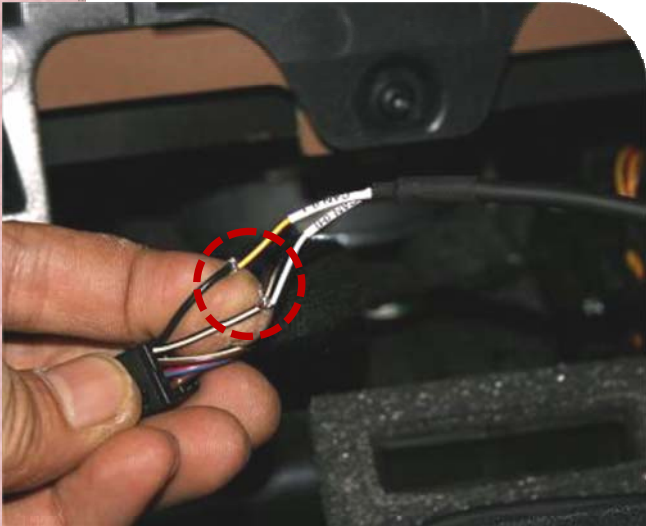

Wire offered CAN wires with CAN wires of the car.  
White+Black : CAN HIGH  
Black : CAN LOW



Connect LCD Out cable coming from the car with LCD-In cable offered with right position like the picture.

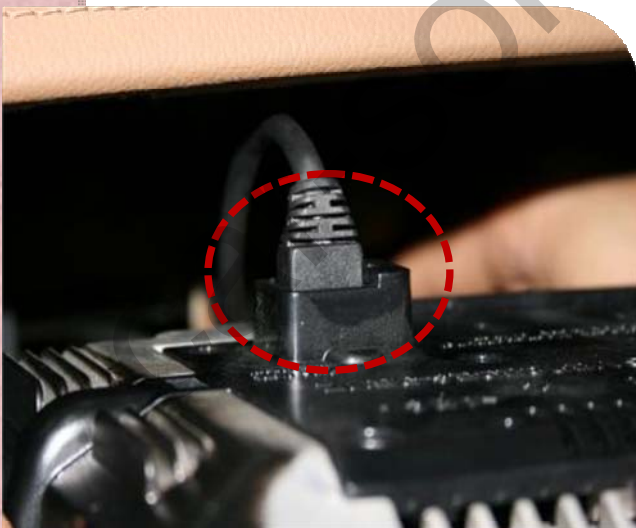

Connect LCD-Out cable to the connector of the monitor.



Picture with all cables connected on the interface.



# Completion



Picture of car interior installed

## ※ Precaution

- You must keep the car key taken off from the car while you work this and finally, connect power of the interface.
- When to connect the interface cable, you must keep the power cable taken off.
- You must work this at the environment without any static electricity or damages.
- All of process on this installation should be done by professionals.

# Installation Guide

-BENZ C-Class (W204)



- High quality
- Higher reliability, stability
- Simple assembly
- Custom design service



# Air-Con Box Disassembly



Remove the Air-con Box with a proper tool.



Be careful with the connected cable when you take apart the air-con box.

# Monitor Disassembly



Take the monitor out from the car after removing the screws. Be careful with the cable connected to the monitor.





# CAN Wiring & LCD In/Out Connection



Wire offered CAN wires with CAN wires of the car.  
White+Black : CAN HIGH  
Black : CAN LOW



Connect LCD Out cable coming from the car with LCD-In cable offered with right position like the picture.



Connect LCD-Out cable to the connector of the monitor.



Picture with all cables connected on the interface.