




FLIR b50

NEW!

Thermal Imaging InfraRed Camera

Fusion (PIP) Feature for Non-invasive monitoring and diagnosing of building conditions




Fusion - Picture in Picture



Built-in Laser Pointer



Built-in Illuminator Lights



Thumbnail Image Gallery



FLIR b50 Features

- *Latest Infrared Detector Technology*
- *Fusion Picture in Picture (PIP)*
- *Bright LED Lamps for Quality Visible Images*
- *Thermal Sensitivity of <math><0.1^{\circ}\text{C}</math> @ 25°C*
- **Instant imaging** — Captures entire room to reveal wet conditions behind surfaces, such as enameled walls and wallpaper and even in places where moisture meters can't reach
- **Insulation Alarm** — Easily detects areas that don't fulfill the insulation requirements
- **Dew Point Alarm** — displays areas with risk of surface condensation where mold growth could occur
- **Visible Light Digital Camera** — 2.3MP resolution with LED lamps provides sharp images regardless of lighting conditions
- **Infrared Thermal Resolution** — High resolution of 19,600 pixels (140 x 140)
- **Fusion Picture in Picture (PIP)** — Displays thermal image super-imposed over a digital image and is scalable in 3 fixed steps to resize the thermal image
- **0.1°C Thermal Sensitivity** — Provides high resolution needed to find problems faster and easier
- **Optimized Temperature Range** — Measures from -4 to 248°F (-20 to 120°C) targeting building applications
- **Thumbnail Image Gallery** — Allows quick search of stored images
- **Laser LocatIR™ Pointer** — Pinpoints the hot spot on the IR image with the real physical target
- **Radiometric JPEG Images** — Patented technology used to save images in standard JPEG format for easy e-mailing and analysis using QuickReport™ PC Software (included)
- *Lightweight — Weighs only 1.3lbs*
- *Easy One-handed Operation*
- *3.5" LCD with Razor Sharp Resolution*
- *Convenient Thumbnail Image Gallery*
- **1GB microSD Card** — Stores more than 1000 Radiometric JPEG images
- **Li-Ion Rechargeable Battery** — Replaceable battery lasts for 5hrs of continuous use
- **Area (Min/Max) Mode** — Spot marker shows the Minimum or the Maximum Temperature reading within the selected area
- **Includes** — 1GB micro SD Card, miniSD adaptor, Li-Ion rechargeable battery, power supply, QuickReport™ software, USB cable, lens cap, hand strap, and heavy duty case



Scalable Picture-in-Picture Fusion

Allows for easier identification and interpretation of infrared images. This advanced technology enhances the value of an infrared image by allowing you to overlay it directly over the corresponding visible image. This functionality combines the benefits of both the infrared image and visual picture at the push of a button. The scalability feature permits you to resize the thermal image in 3 fixed steps on a large 3.5" color display.


Dew Point Alarm

Displays building areas where surface condensation is present which shows a potential for mold growth


Insulation Alarm

Identifies insufficient insulation in building areas where insulation requirements are not met.


Applications

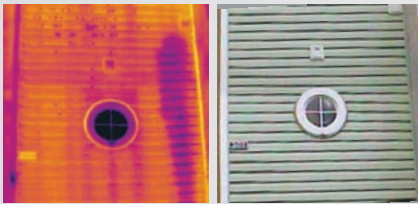

Moisture and Water Leak: Shows the path of a serious leak, completely hidden within the wall where mold growth may occur.

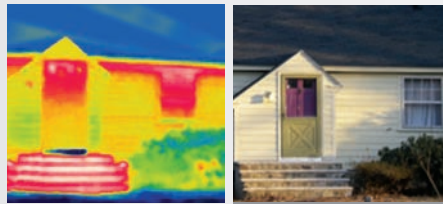

Building Inspection: For inspecting structural differences in homes or commercial buildings



FUSION PIP Image of Heating and Cooling: Identifies faulty building insulation where heat loss or AC cooling is present



FUSION PIP Image of Water Leak: Hidden water leak from the ceiling



The Difference is Training

Insurance companies, restoration firms, building owners, and thermographers already involved in building maintenance and operations require a thorough applications training curriculum leading to certification in infrared building science. In response, the Infrared Training Center (ITC) and the Building Science Institute (BSI) have developed a course for those wishing to receive Building Science Certification. These courses address the Best Practices of the cleaning and restoration industry with content drawn from extensive field experience in thermography and building construction. They include references to actual cases illustrating how IR thermography has pinpointed sources of building moisture, provided definitive Cause and Origin data, enabled energy savings, and prevented incipient catastrophes. The Building Science series emphasizes practical real-world skill building, and includes infrared theory relevant to these skills.

FLIR b50 Specifications


Features	
Temperature range	-4°F to 248°F (-20°C to 120°C)
Temperature accuracy	±2°C or ±2% of reading
Image Storage (1GB micro SD card)	1000 Images
Emissivity Table	0.1 to 1.0 (adjustable)

Imaging Performance / Image Presentation	
Field of view/min focus distance	25° X 25°/0.10m (3.9")
Thermal sensitivity (N.E.T.D)	<0.1°C at 25°C
Detector Type - Focal plane array (FPA) uncooled microbolometer	19,600 pixels (140 x 140)
Spectral range	7.5 to 13µm
Display	3.5" color LCD
Video output	MPEG-4 via USB
Image Modes	Thermal, Visual, Fusion
Fusion Picture in Picture (PIP)	3 fixed steps
Visible Light Camera Resolution	2.3 Megapixels
Laser / Classification	Yes / Class 2
Laser Type	Semiconductor AlGaInP; Diode Laser: 1mW/635nm
Spot (center) Measurement mode	Yes
Area (min/max) Measurement mode	Yes
Image Controls	Palettes (Iron, Rainbow, and Black/White), level, span, auto adjust (continuous/manual)
Focus	Manual
Set-up controls	Date/time, info, LCD intensity, power down, and 21 languages
Battery Type/operating time	Li-Ion/ 5 hours, Display shows battery status
Dimensions/Weight	9.3x3.2x6.9" (235x81x175mm)/<1.32lbs (600g), including battery

Ordering Information



Part Number	Product Description	Price
FLIR b50	Thermal Imaging Infrared Camera with Laser and scalable PIP	
ACCESSORIES		
1196398	Li-Ion Rechargeable Battery	
1910399	AC Adapter Charger (110-240V, U.S. Plug)	
1910490	Cigarette Lighter Adapter Kit, 12VDC (1.2m cable)	
1196474	2-Bay Battery Charger including Power Supply (U.S. plug)	
1122000	Camera Pouch Case	
CERTIFICATION TRAINING		
T-BSC	Certification in Infrared Building Science per attendee (3.5 Day Class)	

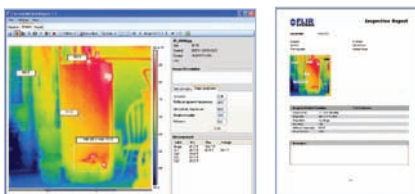

QuickReport™ PC software enables user to analyze Temperature of all thermal pixels of any FLIR Camera JPEG images

Tel: 1.800.464.6372
 CANADA: 1.800.613.0507
 www.goinfrared.com

Specifications and prices subject to change without notice. Rev. 03/05/09-R1
 Copyright © 2009 Extech Instruments Corporation (A FLIR Company). All rights reserved including the right of reproduction in whole or in part in any form.

