



# RTI-651N

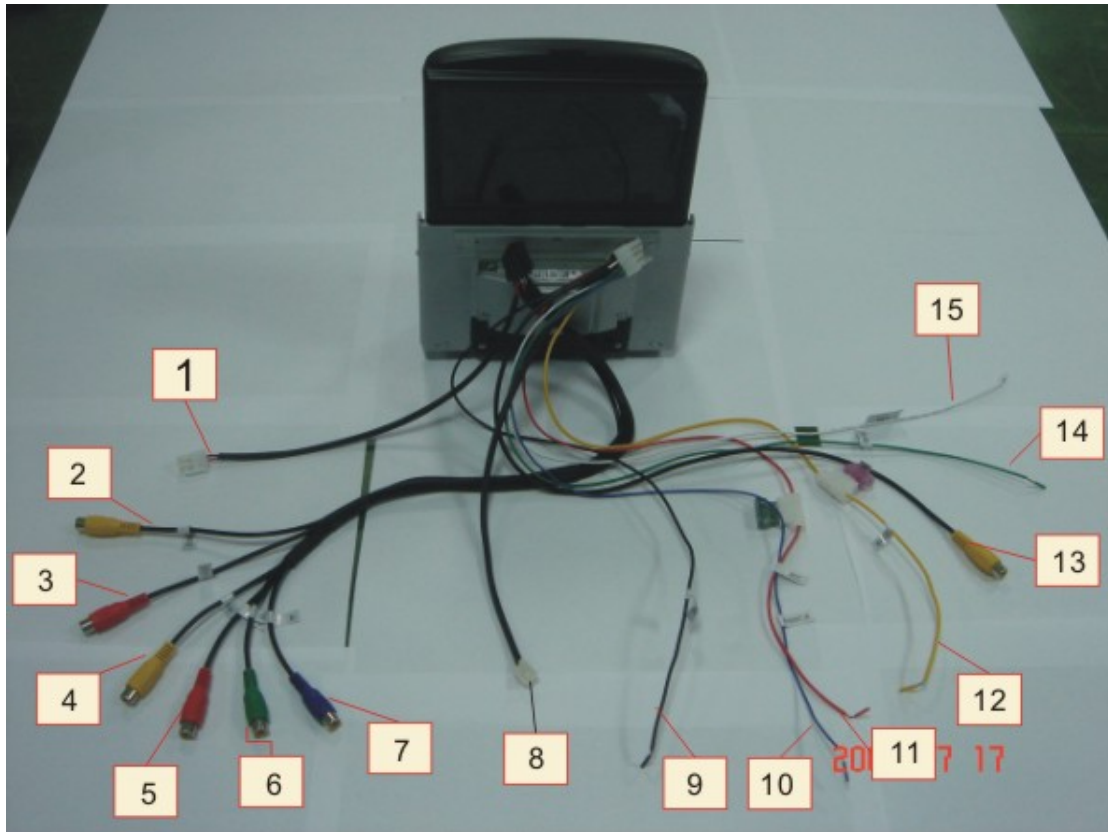

1. White(two pins): Audio Output(only for MOV-652)
2. Yellow RCA AUX Video Input
3. Red RCA GPS Audio Input
4. Yellow RCA GPS Sync
5. Red RCA GPS Input
6. Green RCA GPS Input
7. Blue RCA GPS Input
8. White(three pins):to IR receiver(only for MOV-652)
9. Black: Grounding (GND)
10. Blue DVD/DVT\_IR
11. Red: ACC (12V+)
12. Yellow: BATT (12V+)
13. Yellow:RCA :CCD CAMERA (rear camera)
14. Green Park (12V-)(Brake)
15. White: Reverse (12V+)

## Remote Control

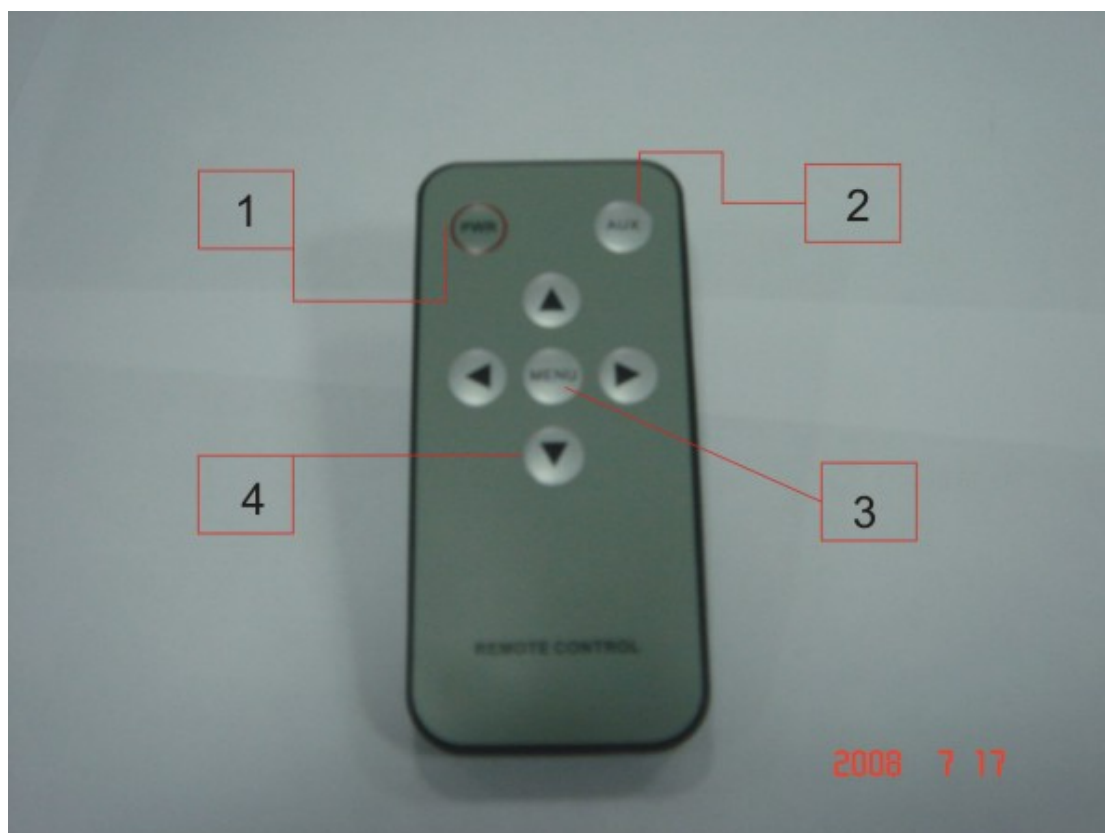

1. **Power** – On/Off Power
2. **AUX/F** – Video Source Switching.
3. **MENU** – OSD Function Menu
4. **Arrow** – User Selection

## Operation

### **Power**

Press the power button to switch on the power. To make the monitor pop down, press the power button again. Press the power for two seconds to switch off the power.

### **Input Source Selection**

Press the AUX/F button to switch between sources. AUX → GPS → AUX

### **OSD Menu**

Press the OSD MENU key to adjust the following functions: Brightness, Color,

Contrast, Tint, Light, Mode, OP/CL. Press the up or down keys to select the function. Press the left and right keys to adjust the function.

Brightness	Brightness Of Picture
Color	Color Density of Picture
Contrast	Contrast of Picture
Tint	Tint of Picture
Light	LIT1.LIT2.LIT3.LIT4
Mode	NORM.FULL
OP/CL	Auto On Function Allows Monitor To Rise Automatically When ACC Is On: Off, Auto
Ruler	Turn On/ Off the reverse warning line

## Specification

SIZE	6.5" INCH
Aspect Ratio	16:9
Resolution (HxV) pixels	1200*234
LCD Drive Method	TFT Active Matrix
Operating Temperature	-30°C ~80°C
Brightness In CD/m <sup>2</sup>	400
On Screen Display	V
Wireless Remote Control	V
Reverse Monitor Selector	V