



Installation Manual

support@car-solutions.com

car-solutions.com



• Manufacturer shall not be liable for reimbursements, claims and damages which are resulted from the unauthorized repair. Repairs shall be done by authorized technicians.

Precautions

- Always wear a seatbelt. Otherwise, passengers would be injured by crashing into the monitor if the vehicle stops suddenly.
- Dust, oil and any contaminants on the display should be removed by cleaning patches.
- Manufacturer is not responsible for incidental damages, consequential damages, the loss of profit and etc while this unit is used or not used.
- The driver shall not operate or watch the device while driving the vehicle. Always park the vehicle in a safe place before operating the product.
- Do not operate the device for a prolonged period of time while the engine is turned off. Otherwise, the battery would be discharged.

📄 Tak	ole of Contents
(j) (i	General spec1
	Components2
را ل ۱	low to use3
የያት ር	Dip Switch4
品」	nstallation Diagram5
× 1	nstallation6
<i>(i)</i> s	pecification9
? 1	rouble Shooting10
	Quality Warranty
0	
\mathbf{V}	



General spec


- 10.1 inch High Resolution LCD
- Smart phone mirroring (Castpro Optional)
- Support various external A/V sources A/V 1~2
- Easy installation
- Able to tilt monitors
- Built-in DivX Player(Qvix) Play Music/Video via USB



	How	to us	e						
	Ċ						+ Headp	ohone ,	
	Modes	Press	Ċ	Ŧ		\sim	^	+ -	-
	All Modes	Long	\bigcirc	MODE		A	X	×	
	All Modes	Short		ОК				VOL+	L —
	QVIX	Long							
		Short			■/๖				
CU	DMB	Long							
		Short				Сн —	Сн+		





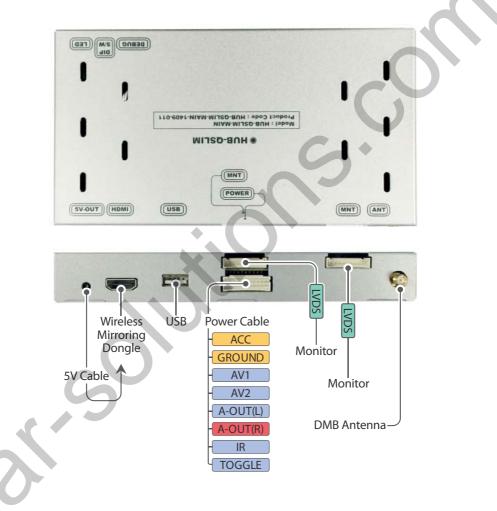



Installation



Remove the back cover from the seat



Check the location of the LVDS cable



Cable should be arranged by using cable tie



Pull out the cable through the hole of bracket



Loose the bolt in order to lift the seat



Fix the bracket on the seats frame by tightening the bolt(making a hole)



Bracket should be covered with the air packaging wrap



Another side of the LVDS cable should be brought to the front under the seat



Installation



Hide and bring two LVDS cables to the cockpit



Dismantle the cover which is located above an brake pedal. Hub interface & QCAST will be placed inside the cover



HDMI &5V Android charge cables should be connected to QCAST



Connect Aux jack cable to the car and Audio CVBS of Aux cable should be linked to Audio CVBS off the power cable



ACC Power is supplied from the cigar jack backside



Connect all cables to hub interface



Installation



Organize the Hub interface and QCAST. Then, reassemble the cover again.



Reassemble the back cover



Monfitor should be fixed by tightening bolts



Reassemble the back cover



	INDEX	CONTENTS			
	Size of Screen	10.1″			
	Brightness	300 cd/m2			
	Resolution	1280 X (RGB)3 X 800			
Display	Response speed	10 msec			
	Angle	150/145 degree			
	Type of Panel	a-Si TFT active matrix			
	Surface	Hard Coating			
	HDMI	ver.1.3, 480P/720P			
	DC 5V OUT	2A, phone charge			
	Headphone	Stereo			
Input / Output	A/V input	3 Audio and Video			
	Analog RGB	800x480 @60Hz, Composite sync			
C	Component	YPbPr, QVIX 480P			
	Component Audio	Stereo			
Etc.	Power	12V			
	Size(mm)	185(H) x 340(V) x 70.5(D)			



• Problems with sound

Please check the status of 'Mute', It should be turned Off.

• Noise from wire earphones/headphones

You are recommended to use wired earphones/headphone which are designed for audio only. (Earphones designed for Mobile phone may have polarity reversal problems)

• Problems with controlling remote control

- Remote control should face the receiver directly.
- Remote control receiver should be avoided from the direct sunlight.
- Check the status of battery and replace the battery if it is not charged.
- Check the position of battery(+,-).

• Problems with selecting USB device in Menu

- Make sure USB is properly inserted to the USB port.
 - Theck whether USB is defective by inserting it to another device.