

Instruction Manual

CarPlay

Car-Solutions.com

INDEX

Specifications

- 1. Main Spec. ----- 3
- 2. Components----- 4
- 3. Exterior ----- 5

Settings ----- 6

Installation

- 1. Connection ----- 7
- 2. Caution ----- 8

Specification

1. Main spec.

1-1. Input Spec.

- 1 x USB Input
- 1 x Microphone Input
- 1 x Real Analog Touch Input

1-2. Output Spec.

- 1 x LVDS(HDMI Connector) Output
- 1 x Audio L/R (3.5Φ Stereo Jack) Output
- 1 x Mono Speaker

1-3. Power Spec.

- Input Power : 8VDC ~ 24VDC
- Consumption Power : 12Watt, Max

Specification

2. Components



Interface 1 EA



TOUCH Cable 2 EA



HDMI Cable 1 EA



AUX Cable 1 EA



SPEAKER Cable 1 EA




Power Cable 1 EA



Microphone 1 EA

Specification


3. Exterior

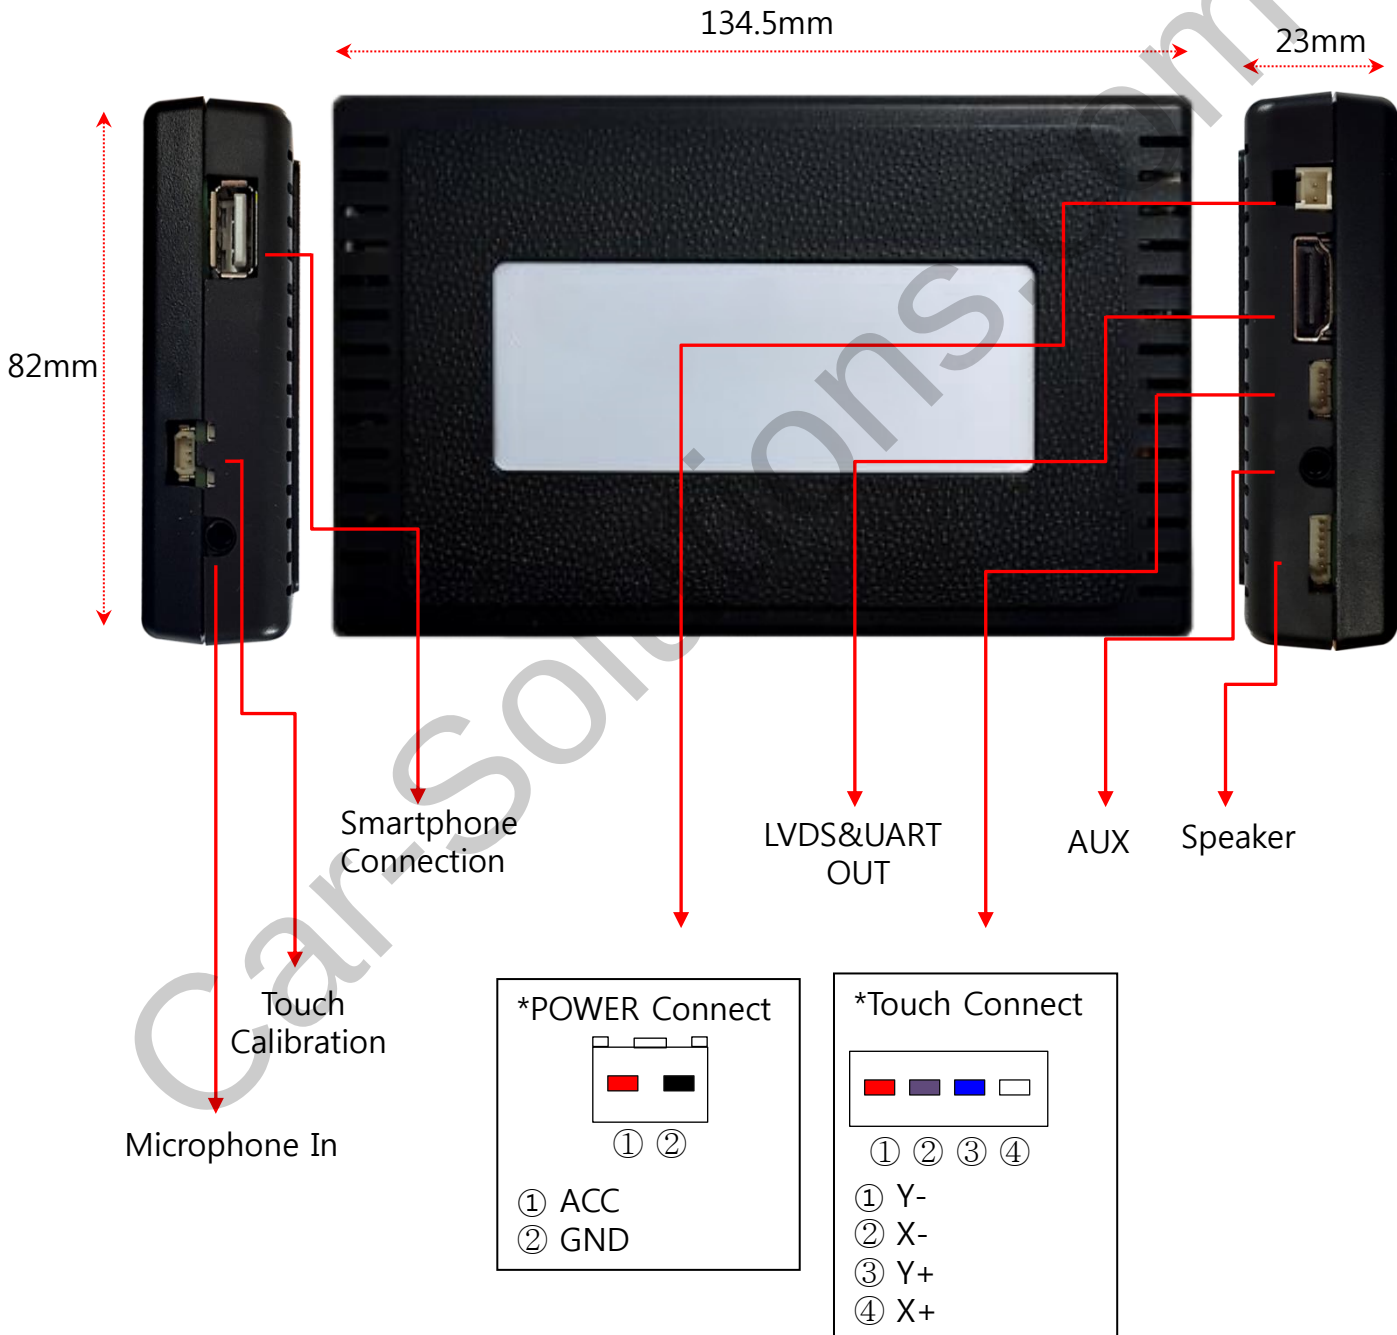


Settings



1. Press the setting button for 3 seconds.

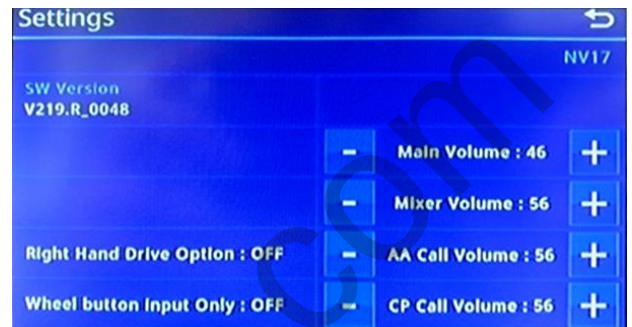

2. When the above menu appears, press the setting button for 3 seconds.

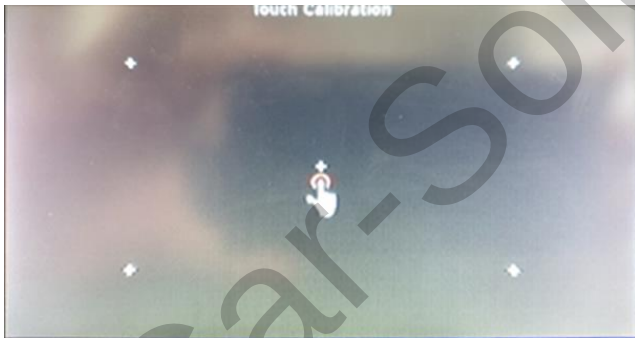

3. Calibrate the touch screen

Installation

Connection



Caution

1. FAQ

- Not possible to switch mode
 - Check connection of OSD Key pad wire
 - Check CAN connection
- Display wrong size of picture
 - Check Dip s/w setting
- Display black screen in OEM mode
 - Check connection of LVDS/LCD cable
- Not possible to switch to rear screen
 - Check the packing setting
(OSD Menu – option – RearCam-Det)

2. Caution

- The device must not be installed in where it interferes driving (close to brake pedal, steering wheel, airbag etc.)
- LVDS cable must be connected correctly according to the manual
- Insulate the end of wire by using electrical tape
- The installation should be done by expert
- GU electronic does not take any responsibility for any problem caused by wrong installation