


Version: 1.0  
Last update: 27-07-2022

## Technical datasheet

### Prusament PLA Blend by Prusa Polymers

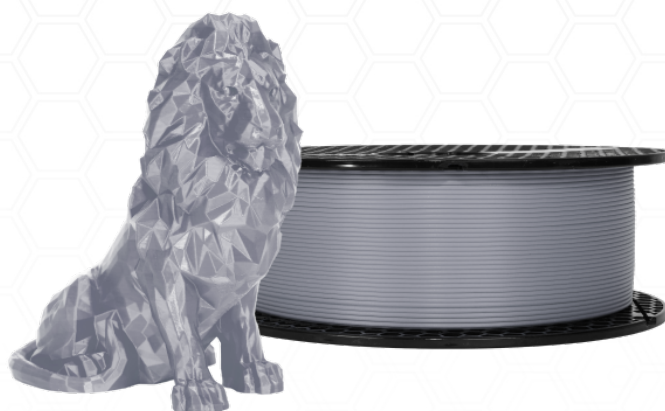

## Identification

Trade Name	Prusament PLA Blend
Chemical Name	Polylactic Acid
Usage	FDM/FFF 3D printing
Diameter	1.75 ± 0.03 mm
Manufacturer	Prusa Polymers a.s., Prague, Czech Republic

## Recommended print settings

Nozzle Temperature [°C]	210 ± 10
Heatbed Temperature [°C]	40-60
Print Speed [mm/s]	up to 200
Cooling Fan Speed [%]	100
Bed Type	smooth PEI sheet; powder coated sheet; satin sheet
Additional Info	The brim is not necessary in general.

## Typical material properties

	Typical Value	Method
MFR [g/10 min](1)	9-11	ISO 1133
MVR [cm <sup>3</sup> /10 min](1)	8-10	ISO 1133
Density [g/cm <sup>3</sup> ]	1.24	ISO 1183
Moisture Absorption in 24 hours [%](2)	0.13	Prusa Polymers
Moisture Absorption in 7 days [%](2)	0.19	Prusa Polymers
Heat Deflection Temperature (0.45 MPa) [°C]	55	ISO 75
Heat Deflection Temperature (1.80 MPa) [°C]	52.5	ISO 75
Tensile Yield Strength for Filament [MPa]	45.3 ± 0.4	ISO 527
Hardness - Shore D	72 ± 1.5	Prusa Polymers
Interlayer Adhesion [MPa]	6 ± 1.3	Prusa Polymers

(1) 2.16 kg; 210 °C

(2) 24 °C; humidity 22 %


## Mechanical properties of 3D printed testing specimens(3)

Property\Print Direction	Horizontal	Vertical xz	Method
Tensile Yield Strength [MPa]	32 ± 2	42 ± 1	ISO 527-1
Tensile Modulus [GPa]	1.6 ± 0.1	1.9 ± 0.1	ISO 527-1
Elongation at Yield Point [%]	3 ± 0.2	3.5 ± 0.1	ISO 527-1
Flexural Strength [MPa]	47 ± 1	60 ± 1	ISO 178
Flexural Modulus [GPa]	2 ± 0.1	1.6 ± 0.1	ISO 178
Deflection at Flexural Strength [mm]	7.5 ± 0.1	6.7 ± 0.1	ISO 178
Impact Strength Charpy [kJ/m <sup>2</sup> ](4)	13 ± 1	15 ± 1	ISO 179-1
Impact Strength Charpy Notched [kJ/m <sup>2</sup> ]	not applicable	not applicable	ISO 179-1

(3) Original Prusa i3 MK3 3D printer was used to print testing specimens. Slic3r Prusa Edition 1.40.0 was used to create G-code following settings:

Prusament PLA Filament;  
Print Settings 0.20 mm FAST (layers 0.20 mm);  
Solid Layers Top: 0, Bottom: 0;  
Perimeters: 2;  
Infill 100% rectilinear;  
Infill Print Speed 200 mm/s;  
Nozzle Temperature 215 °C all layers;  
Bed Temperature 60 °C all layers;  
Other parameters are set as default.

(4) Charpy Unnotched – Edgewise direction of blow according to ISO 179-1

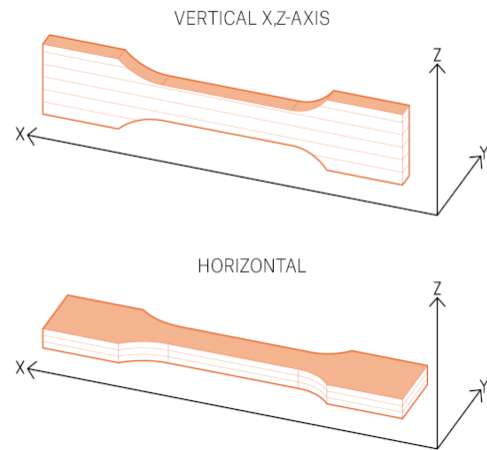

**Disclaimer:**

The results presented in this data sheet are just for your information and comparison. Values are significantly dependent on print settings, operator experiences, and surrounding conditions. Everyone has to consider suitability and possible consequences of printed parts usage. Prusa Polymers can not carry any responsibility for injuries or any loss caused by using Prusa Polymers material. Before using Prusa Polymers material read properly all the details in the available safety data sheet (SDS).