

### General information

#### Properties

- Filament for FFF-printers with major PA 6 content
- unfilled
- high tensile strength
- low water absorption
- low warping effect
- excellent adhesion to epoxy based fiber plates
- chemical resistant to many oils, carburant and chemicals
- good hydrolysis resistance
- very smooth surfaces possible (bone white color)


| Mechanical properties                                         | Test methode                  | Units                     | Typical value | Quality grade acc. VDI 3405 Part 7 |
|---------------------------------------------------------------|-------------------------------|---------------------------|---------------|------------------------------------|
| Density                                                       | DIN EN ISO 1183               | g/ cm <sup>3</sup>        | 1,2           |                                    |
| Modulus of Elasticity printed specimen x-y (0°) ***           | DIN EN ISO 527-2 Typ 1A *     | MPa (N/mm <sup>2</sup> )  | 3.400         | 6                                  |
| Tensile strength printed specimen x-y (+ 45°/-45°) ***        | DIN EN ISO 527-2 Typ 1A *     | MPa (N/mm <sup>2</sup> )  | 80            |                                    |
| Tensile strength printed specimen x-y (0°) ***                | DIN EN ISO 527-2 Typ 1A *     | MPa (N/mm <sup>2</sup> )  | 80            | 8                                  |
| Tensile strength printed specimen x-y (90°) ***               | DIN EN ISO 527-2 Typ 1A *     | MPa (N/mm <sup>2</sup> )  | 35            | 3                                  |
| Tensile stress printed specimen x-y (0°)                      | DIN EN ISO 527-2 Typ 1A *     | MPa (N/mm <sup>2</sup> )  | 77,31         |                                    |
| Elongation printed specimen (0°)                              | DIN EN ISO 527-2 Typ 1A *     | %                         | 3,56          | 1                                  |
| Flexural modulus E <sub>f</sub> printed specimen (+ 45°/-45°) | DIN EN ISO 14125 (Method B)** | GPa (kN/mm <sup>2</sup> ) | 2,37          |                                    |
| Impact strength printed specimen                              | DIN EN ISO 179eU              | kJ/m <sup>2</sup>         | --            |                                    |
| Impact strength printed specimen (notched)                    | DIN EN ISO 179eB              | kJ/m <sup>2</sup>         | 2,26          |                                    |

\* Testing specimen printed: E3D V6; 0,4mm nozzle; temp. nozzle 275°C Pro/ 285°C Lite ; build plate temp. 90°C; layer 0.2 mm; v=50 mm/s; conditioned 24h @ 50% rel. humidity / 23°C; layer orientation in °

\*\* Printed: E3D Volcano; 0,6 mm nozzle; temp. nozzle 255°C unfilled /260°C fiber; build plate temp. 75°C; layer 0.3 mm; v=45 mm/s; conditioned 24h @ 50% rel. humidity / 23°C; layer orientation in °

\*\*\* Target value for optimal print quality. Values might vary greatly with the same settings, depending on the system Nozzle - Printer - Gcode.

### Orientation of printed specimen

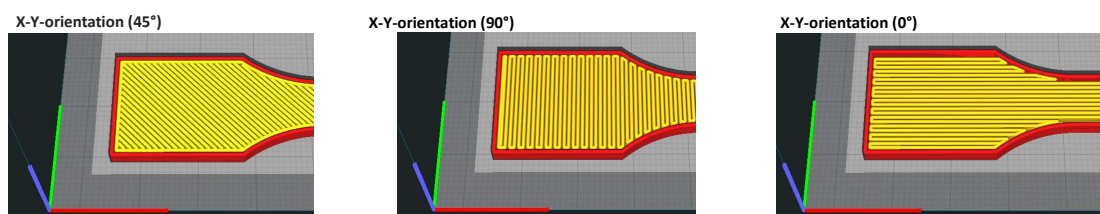

| Thermal properties                    | Test methode  | Units | Typical value                                       | notes |
|---------------------------------------|---------------|-------|-----------------------------------------------------|-------|
| Glass transition temp.                | DIN ISO 11357 | °C    | 72                                                  |       |
| Heat distortion temp. (HDT A@1,8 MPa) | DIN ISO 75    | °C    | 90 °C ( Continuous service temp. 120°C - IEC 60216) |       |

| Electrical properties | Test methode | Units | Typical value     | notes |
|-----------------------|--------------|-------|-------------------|-------|
| Insulation resistance | IEC 60167    | Ohm*m | >10 <sup>12</sup> |       |
| Surface resistance    | IEC 60093    | Ohm   | >10 <sup>12</sup> |       |

| Other properties             | Test methode | Units | Typical value | notes |
|------------------------------|--------------|-------|---------------|-------|
| Water absorption (after 24h) | DIN ISO 62   | %     | < 0,3         |       |

| Recommendations                                                           | Test methode    | Units           | Typical value                                       | notes |
|---------------------------------------------------------------------------|-----------------|-----------------|-----------------------------------------------------|-------|
| Temperature nozzle                                                        | Fiberthree GmbH | °C              | 260 - 290                                           |       |
| Temperature build plate                                                   | Fiberthree GmbH | °C              | Max. 80                                             |       |
| Nozzle diameter                                                           | Fiberthree GmbH | mm              | > 0,20                                              |       |
| Fan cooling                                                               | Fiberthree GmbH | %               | max 30%                                             |       |
| Layer height                                                              | Fiberthree GmbH | mm              | starting with 0,10                                  |       |
| Recommended wall thickness to reduce significantly the impact of moisture | Fiberthree GmbH | mm              | 3                                                   |       |
| Printing speed                                                            | Fiberthree GmbH | mm/s            | 25                                                  |       |
| Infill                                                                    | Fiberthree GmbH | %               | 0 - 100                                             |       |
| Retraction (direct drive/ bowden system)                                  | Fiberthree GmbH | mm (@ 50mm/sec) | direct drive min. 2mm / bowden system min. 6mm      |       |
| Material build plate                                                      | Fiberthree GmbH |                 | carbon fiber, glass fiber or phenolic resins, glass |       |
| Recommended nozzle                                                        | Fiberthree GmbH |                 | all nozzles                                         |       |
| Recommended parts                                                         | Fiberthree GmbH |                 | High strength parts with smooth surface             |       |

### EU & REACH Conformity

given

### Legal disclaimer

Technical properties or values are related to the thermoplastic base material for filament production if not mentioned differently.

Any recommendation made for use of seller's materials are made to the best knowledge and are based upon prior tests and experience of the seller. Seller does not guarantee the results to be obtained and all such recommendations are non-binding and do not constitute any representation and do not affect in any way buyer's obligation to examine and test the seller's goods with regard to their suitability for buyer's foreseen purposes.

No information given by the seller is to be construed in any way as a guarantee regarding characteristics or duration of use, unless such information has been explicitly given as a guarantee.