

Updated date : 2015.11.10

Model : RGB-LE-V4.0

RGB-LE CONVERTER

Specification & Installation



Contents

1. Before installation

1.1 Main specification	3
1.2 System diagram.....	4
1.3 Components.....	5
1.4 Exterior	6

2. Setup

2.1 DIP switch.....	7
2.2 Remote controller	8
2.3 Power cable wiring diagram	9

3. Installation

3.1 Cautions on installation	10
3.2 Installation diagram	11

4. Troubleshooting	12
--------------------------	----

1.1 Main Specification

1. Input Spec. (MULTI VIDEO INTERFACE)

- 2 x CVBS Input (External video source).
- 1 x CVBS (REAR CAMERA) Input (Rear camera source)
- 1 x Analog RGB Input (Car commander original monitor output)
- 1 x Analog RGB Input (Navigation System output)-→OPTION

2. Output Spec.

- 1 x CVBS OUTPUT (Video Out for installing Headrest monitor)
- 1 x RGB OUTPUT(LCD Operation)
- 1 x Audio Select OUTPUT (For operating A/V sources – (ex) 12V is come out on V1 port, when AV1 is chosen.)


3. Power Spec.

- Input Power : 8VDC ~ 18VDC
- Consumption Power : 5WATT, Max


4. Switch Input mode

- NAVI/CVBS1,2 Original MUTE Function : Possible to mute each input by operating Dip S/W
- Possible to switch Input mode with remote control or toggle switch.
- Rear View Camera mode : When to sense rear gear power, be switched to Rear view camera mode (Impossible to switch to rear mode with Toggle S/W or the Remote control)


1.2 System Diagram

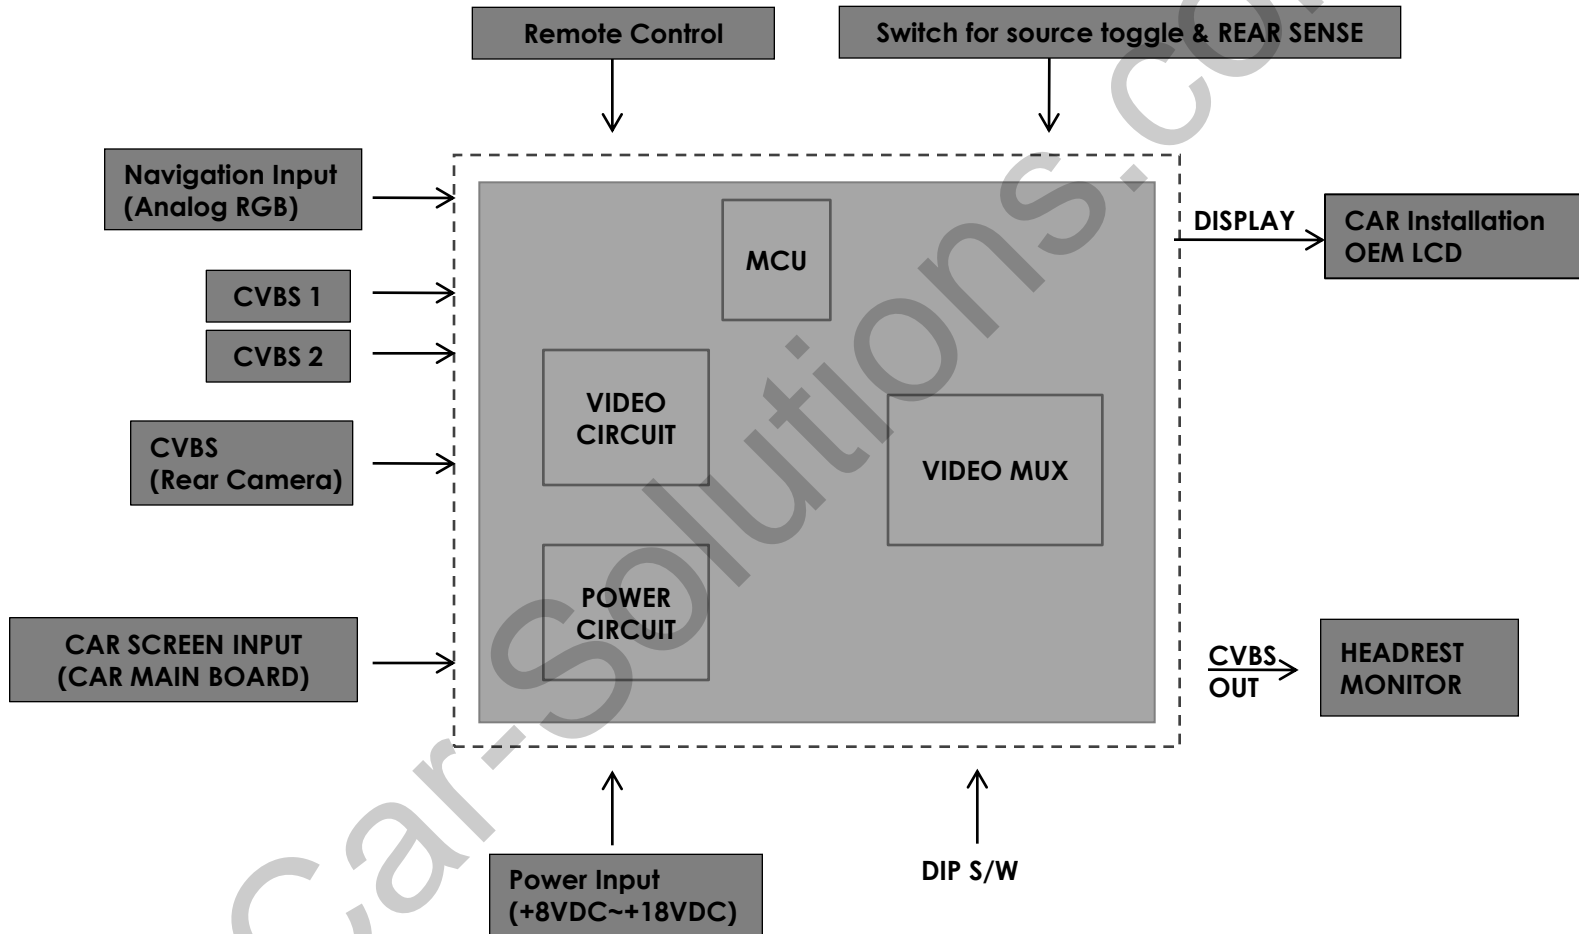

1.3 Components

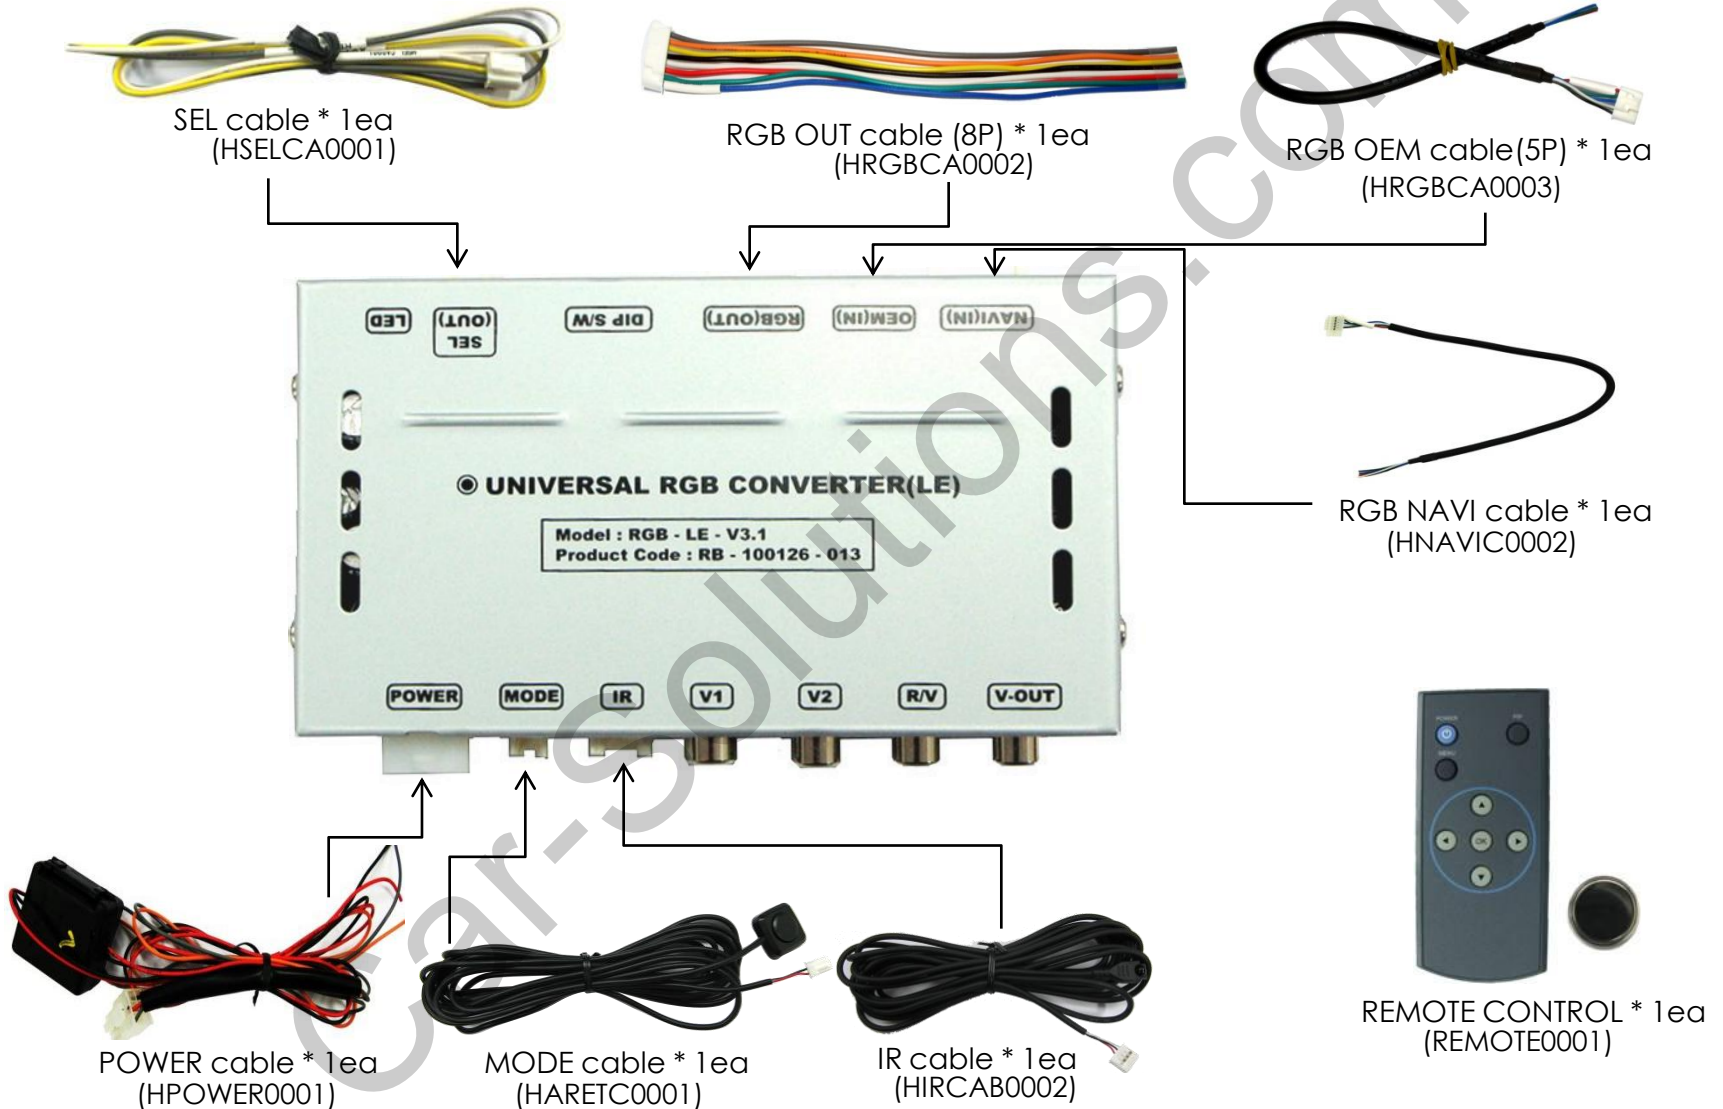

1.4 Exterior

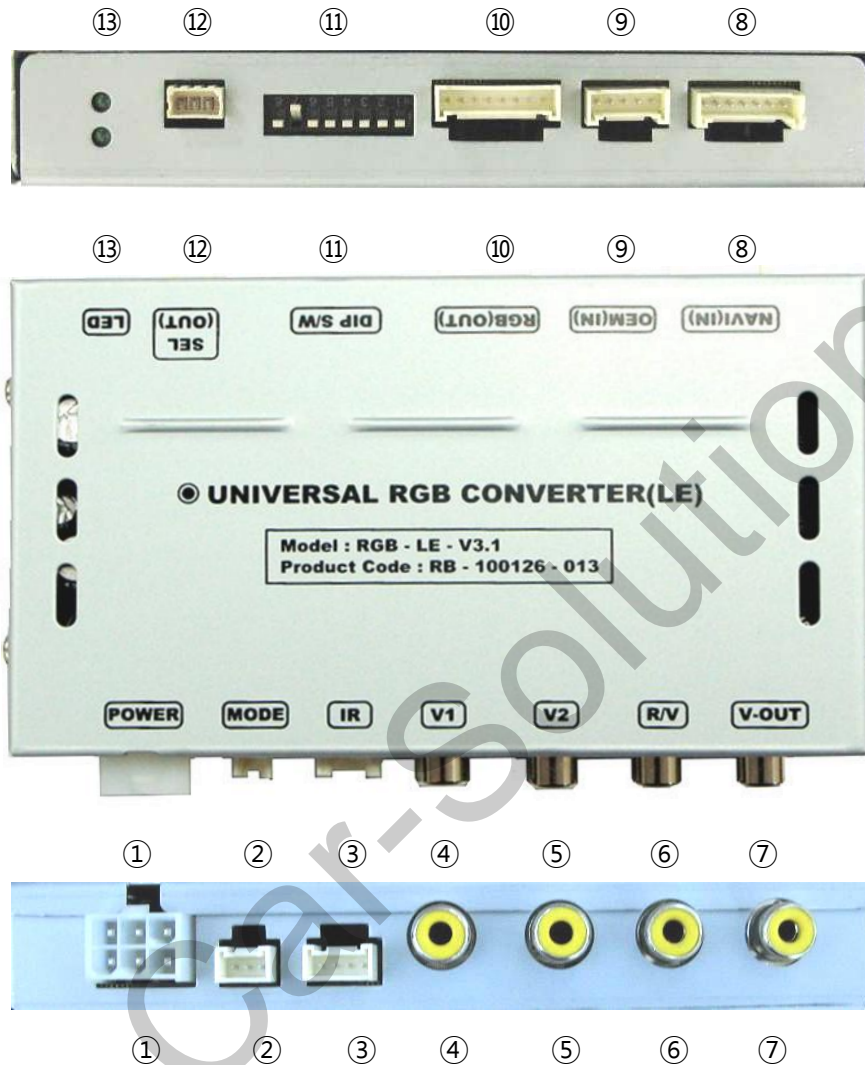

Dimension

Horizontal length 129mm
Vertical length 75mm
Height 21mm

- ① POWER
- ② MODE
- ③ IR
- ④ V1
- ⑤ V2
- ⑥ R/V
- ⑦ V-OUT
- ⑧ NAVI (IN)
- ⑨ OEM (IN)
- ⑩ RGB OUT
- ⑪ DIP S/W
- ⑫ AUDIO-SEL
- ⑬ LED

2.1 DIP switch

#PIN	Function	DIP S/W selection
1	RGB INPUT skip	ON : Skipping RGB Mode OFF : RGB Display
2	CVBS1 Skip	ON : Skipping CVBS1 OFF : CVBS1 Display
3	CVBS2 Skip	ON : Skipping CVBS2 OFF : CVBS2 Display
4	OEM Skip	ON : Skipping OEM OFF : OEM Display
5	OEM Button Usage	5-OFF, 6-OFF : E-Class(W211)
6		5-OFF, 6-ON : PHAETON 5-ON, 6-OFF : CAYENNE 5-ON, 6-ON : BENZ W164
7	REAR MODE	ON : External Rear Camera OFF : OEM Rear Camera
8	No use	OFF: Default



* Caution

- If the displayed screen vibrates, please try to operate Dip S/W No. 6 after turning power off.

※ Please make sure to disconnect the power cable of the interface and reconnect the power cable again to apply the dip switch setting whenever changing DIP switch.

Otherwise, DIP switch setting will not be applied.


2.2 Remote controller

Key	Function
PIP	RESET – long press
MENU	Not for use
OK	Making a selection
▲	Display brightness higher
▼	Display brightness lower
◀	Chroma higher
▶	Chroma lower



SIZE : 85 * 40 * 8 (mm)


2.3 Power cable wiring diagram

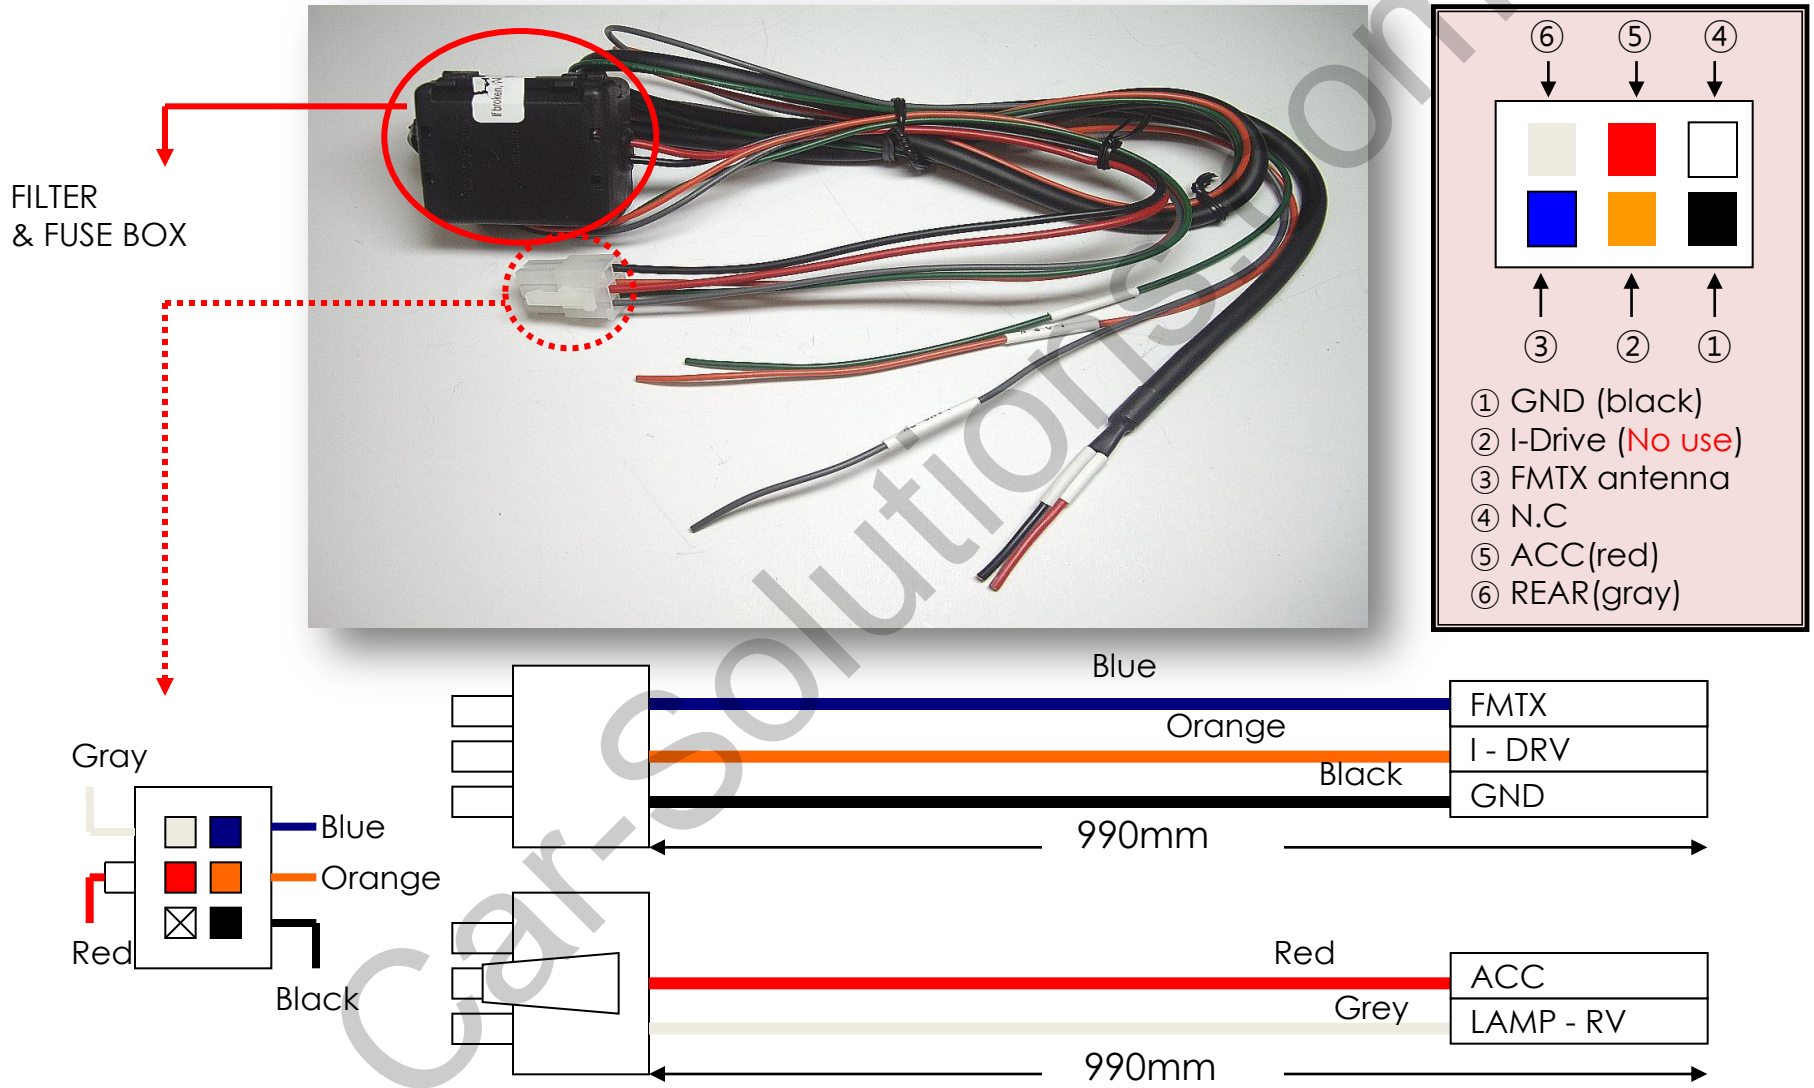

3.1 Cautions on installation

- Ignition key should be taken off before starting installation, interface power connection must be the last step in installation.
- Power cable should be separated when connecting interface.
- Should be no any electronic devices or magnetic pole around installation place.
- All steps of installation should be done by well-trained specialist.
- Dismantling without manufacturer's permission can not be guaranteed, (No permission to break attached label on the board.)
- Kindly check all parts are in the box, when receiving the product, if anything missing, inform to the supplier or manufacturer.
- According to our sales policy, any problems caused by user's mistake, careless can not be guaranteed.
- It may not work on a camera with 12V

3.2 Installation diagram

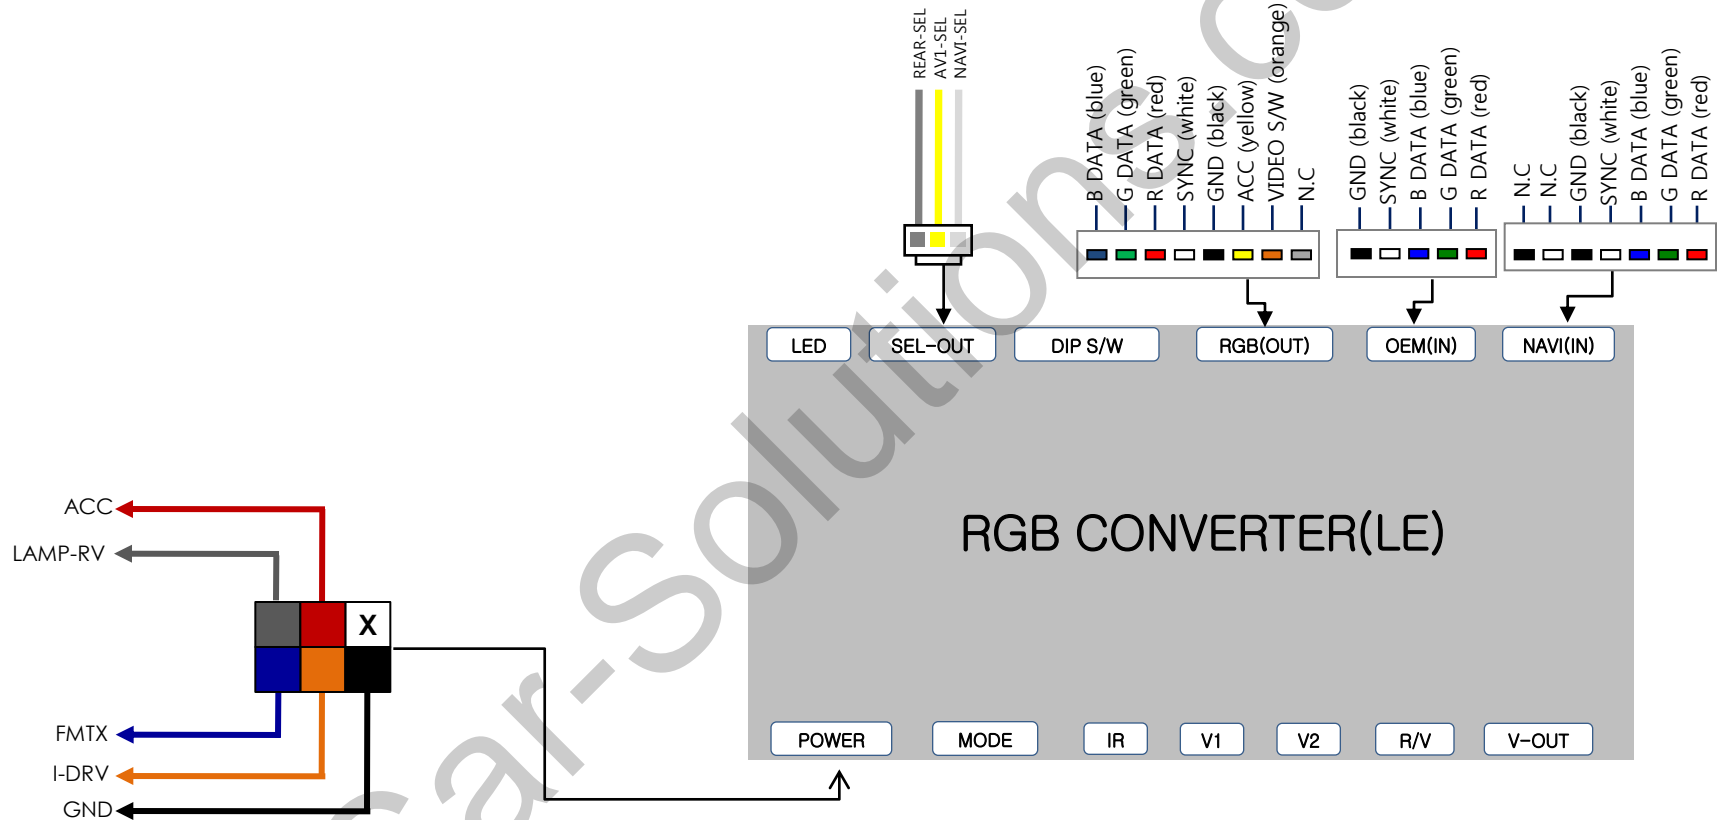

4. Troubleshooting

Q. I can not switch A/V sources.

A. Check IR or Ground cable connection. Check LED lamps in the interface, if it is not on, check power cable.

Q. All I got on the screen is black.

A. Check second LED lamp of the interface is on, if not, check A/V sources connected are working well.
(Second lamp indicates AV sources connected works well.) Check interface connection has been done well.

Q. Displayed image color is not proper. (too dim or not suitable color)

A. Try to select "INITIAL" in OSD menu, if it does not work, inform the manufacturer.)

Q. Rear camera image does NOT appear.

A. Set DIP switch #7 in "ON"

Q. Unwanted A/V mode is displayed. (A/V source switching order : OEM->RGB->AV1->AV2->AV3)

A. Check DIP Switch Setting.

Q. OEM image is not displayed.

A. Check interface's LCD In/Out cable connection. If the status keeps on, inform the manufacturer.

Q. Screen only displays white like left picture.

A. Check LCD out cable is connected well, if this status keeps, inform the manufacturer.